

Clutch Mandrel Ø26.5mm

KL-0500-15

Suitable for BMW and Audi.

Designed to align the clutch disc before the re-installation of a pretensioned SAC clutch. Can also be used to align new and already pretensioned SAC clutches.



Clutch Centring Sleeve Ø32.5 mm

KL-0500-22

Suitable for BMW vehicles with engine N54B30 e.g. E90 / E91 / E92 / E93 (335i)

Used to centrally align the clutch disc before installing or re-installing a SAC clutch.

Technical Data:

Inner Ø:	15 mm
Outer Ø:	32.5 mm

Scope of Delivery:

KL-0500-22 Clutch Centring Sleeve Ø32.5 mm

Part No.	Description	Qty.
KL-0015-0010	Hex screw M5x45	1
KL-0500-2201	Centring sleeve	1



Pin-Type Face Spanner Ø14 -100, Pin Ø5 mm

KL-0149-131


Suitable for example for Audi A4, A6, A8 and VW Passat.

Designed to keep the fan-belt pulley in position when removing and installing the Visco-Fan on Audi A4, A6, A8 and VW Passat etc.

It can also be used to remove the pre-tension ring when installing a new SAC-clutch on Audi, Fiat etc.

Technical Data:

Ø:	14 -100 mm
Pin Ø:	5 mm
Pin height:	6 mm
Overall Length:	215 mm
Weight:	300 g

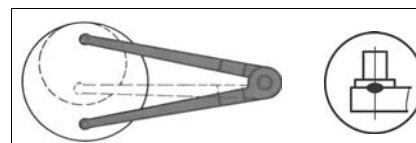

Upgrade Kit (4 hole pitch) for KL-0500-40 K

KL-0500-4014

Required for pretensioning the clutch pressure plate before removing and installing SAC-clutches with 4 hole pitch.

Scope of Delivery:

KL-0500-4014 Supplement Kit (4 hole pitch) for KL-0500-40 K

Part No.	Description	Qty.
KL-0500-4006	Knurled nut	1
KL-0500-4006 A	Knurled nut	1
KL-0500-4007	Thread bolt M6	1
KL-0500-4008	Thread bolt M7	1
KL-0500-4009	Thread bolt M8	1
KL-0500-4011	Base plate with 4-hole-pitch	1

