

Flywheel Locking Tool (adjustable)


(German Utility Model)

KL-0182-10 A

This tool is required for locking the flywheel when the gearbox has been removed. Universal application. The tool can be adjusted axially and radially and can, therefore, be used almost universally by screwing in different stud bolts.

Technical Data:

Bolt-Ø:	8.5 mm
Bolt distance:	92 - 107 mm

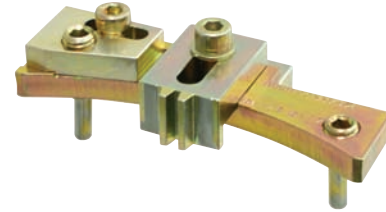

Special Socket XZN M8, 800 mm

KL-0232-1

Suitable for VW-Audi, etc.

This special socket enables the drive shaft fixing screws to be loosened from the differential flange quickly and easily from the outside. Not intended for use on impact wrenches.

Advantages

- Substantial time savings.

Technical Data:

Size (width across flats):	XZN M8
Drive:	1/2"
Length:	800 mm



Special Socket XZN M10, 800 mm

KL-0232-2

Suitable for VW Golf IV etc.

Special Socket XZN M12, 800 mm


KL-0232-3

Suitable for VW T4, Touareg etc.

Special Socket XZN M14, 800 mm

KL-0232-4

Suitable for VW T4, Touareg etc.




Puller for Release Shaft Fiat Ducato

KL-1600-10

Suitable for Fiat Ducato (94 onwards) with pull-action clutch.

Intended for the removal of the clutch release shaft. This tool is needed when removing the gearbox, for example when replacing clutches or for gearbox repairs.



Releaser Bearing Removal Mandrel

KL-1600-11

For use on Fiat Ducato 1994 onwards with pull-action clutch.

To remove the releaser bearing from the pressure plate, the circlip must be pretensioned with removal mandrel KL-1600-11.

