


**KL-0179-11 Bearing Grease Arrangement Ø 114 mm**




Fast, Efficient, Universal.  
Simply place the bearing between the cones, tighten, and apply grease through the fitting on the end of the threaded shaft. Forces out old grease and evenly injects fresh grease.

**Technical Data:**

Cone-Ø:	114 mm
Weight:	460 g

**KL-0179-12 Bearing Grease Arrangement Ø 165 mm**

3





Fast, Efficient, Universal.  
Simply place the bearing between the cones, tighten, and apply grease through the fitting on the end of the threaded shaft. Forces out old grease and evenly injects fresh grease.

**Technical Data:**

Cone-Ø:	165 mm.
---------	---------

**KL-0192-5 Circlip Pliers Ø 40-100 mm**

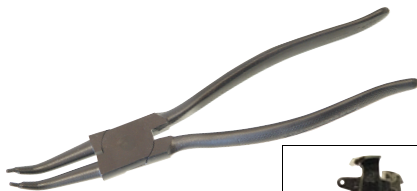

Due to the 45° angled tips, this tool is ideal for inside safety clips. Required for gearbox and wheel bearing repairs.

**Technical Data:**

TipØ	2.5 mm
Length:	220 mm
Weight:	220 g

**KL-0192-6 Circlip Pliers Ø 85-165 mm**



The specially designed tips (angled at 45°) allows trouble-free removal and installation of inner safety clips. Required for gearbox and wheel bearing repairs.

**Technical Data:**

TipØ	3 mm
Length:	310 mm
Weight:	410 g